

BRISBANE 07 38487755 MELBOURNE 03 95800377 SYDNEY 02 98228411

M O X O N

AUSTRALIAN CYPRESS




Established - 1903

From Forest to Finished Product Moxon offers from its 100% owned vertical chain.

Barakula Gold

Sustainable Certified Australian Cypress

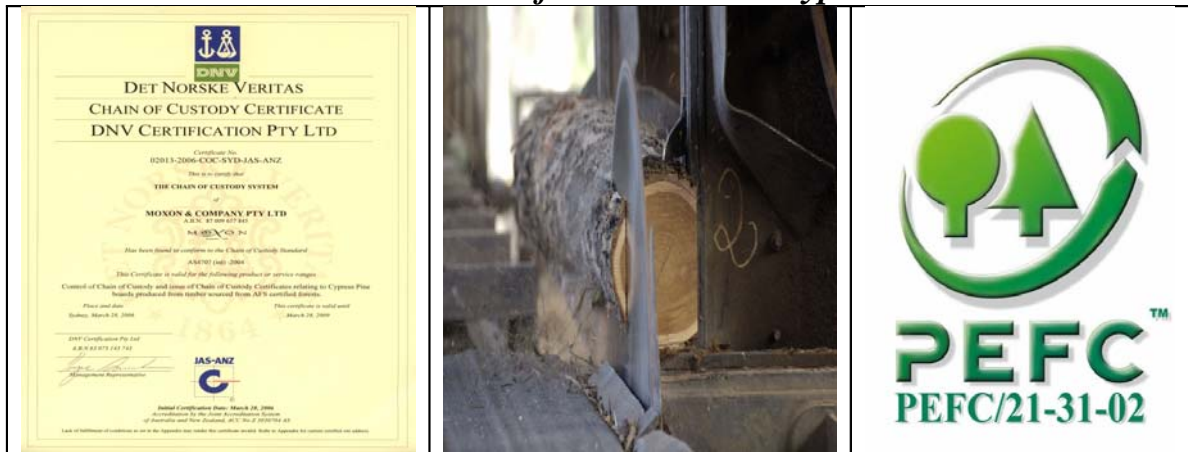

The Cypress harvested from the Barakula State Forest in Western Queensland is otherwise known as "Barakula Gold" due to the superior quality of the raw material. Moxon's Cypress mill in Chinchilla draws 100% of its product from the Barakula State Forest and as such is the only mill to be able to offer the "Barakula Gold" range of Cypress products to our customers.

We are the 1st Australian Cypress mill to attain AS4707 Certification thus guaranteeing the product you buy is "Sustainable Certified Australian Cypress" See www.forestrystandard.org.au and www.pefc.org

Botanic Specie	Callistris glaucophylla		
Density at 12%	680 kg / m3	Max Crushing Strength	53 (MPa)
Impact (Izod value) (J)	4.6 (Nm)	Modulus of rupture	79 (MPa)
Hardness (Janka)	6.5 (kN)	Modulus of Elasticity	9.0 (GPa)

Products:

Finished Size & Condition	Random length 0.9 to 5.4	Set Length	Avail Custom Moulded ?	Available Pre-Oiled
115x70 AD	Yes	2.4 3.0 3.6	Yes ex 125x75	yes
90x90 AD	yes	2.4 2.7 3.0 3.6 3.9 4.2	Yes ex 100x100	yes
115x115 AD	yes	2.4 2.7 3.0 3.6 3.9 4.2	Yes ex 125x125	yes
85x20 T&G EM KD Flooring	yes	On Request	Yes ex 100x25	On Request
98x20 T&G EM KD Flooring	yes	On Request	Yes ex 113x25	On request
93x20 DeckingAD	yes	On Request	Yes ex 100x25	yes
68x20 DeckingAD	yes	On Request	Yes ex 75x25	yes
Other sizes n profiles	On Request	On Request	Yes depends volume	On request

Barakula Gold Australian Cypress can be factory coated with SW3356 a low toxicity wood preservative/stabilizer which is designed to resist surface mould and fungus, water staining and will assist with dimensional stability. In order to maintain the natural beauty and character of Barakula Gold Australian Cypress it must be painted or stained within 3 months of exposure to weather. Failure to do so will result in surface graying and may accentuate longitudinal checking.